



| | | | | |
|---|---------------------|-------------------|---------------------|-------------------------|
| Bearings are magnetic Distances in metres Elevation in FT AMSL Coordinates WGS84 | AFIS 119.650 | AD ELEV 610 | TRENTO / MATTARELLO | |
| | | APRON ELEV 605 | L I D T | 46°01'24" N 11°07'30" E |

| RWY | QFU | THR | bearing strength |
|-----|------|-----------------------------------|------------------|
| 18 | 180° | N 46°01'33.28" E 011°07'29.67" | 16000 Kg |
| 36 | 360° | N 46°01'01.50" E 011°07'29.64" | S I W L |

| RWY | QFU | THR |
|-------|------|-----------------------------------|
| 18GLD | 180° | N 46°01'11.41" E 011°07'31.20" |
| 36GLD | 360° | N 46°01'04.13" E 011°07'30.90" |

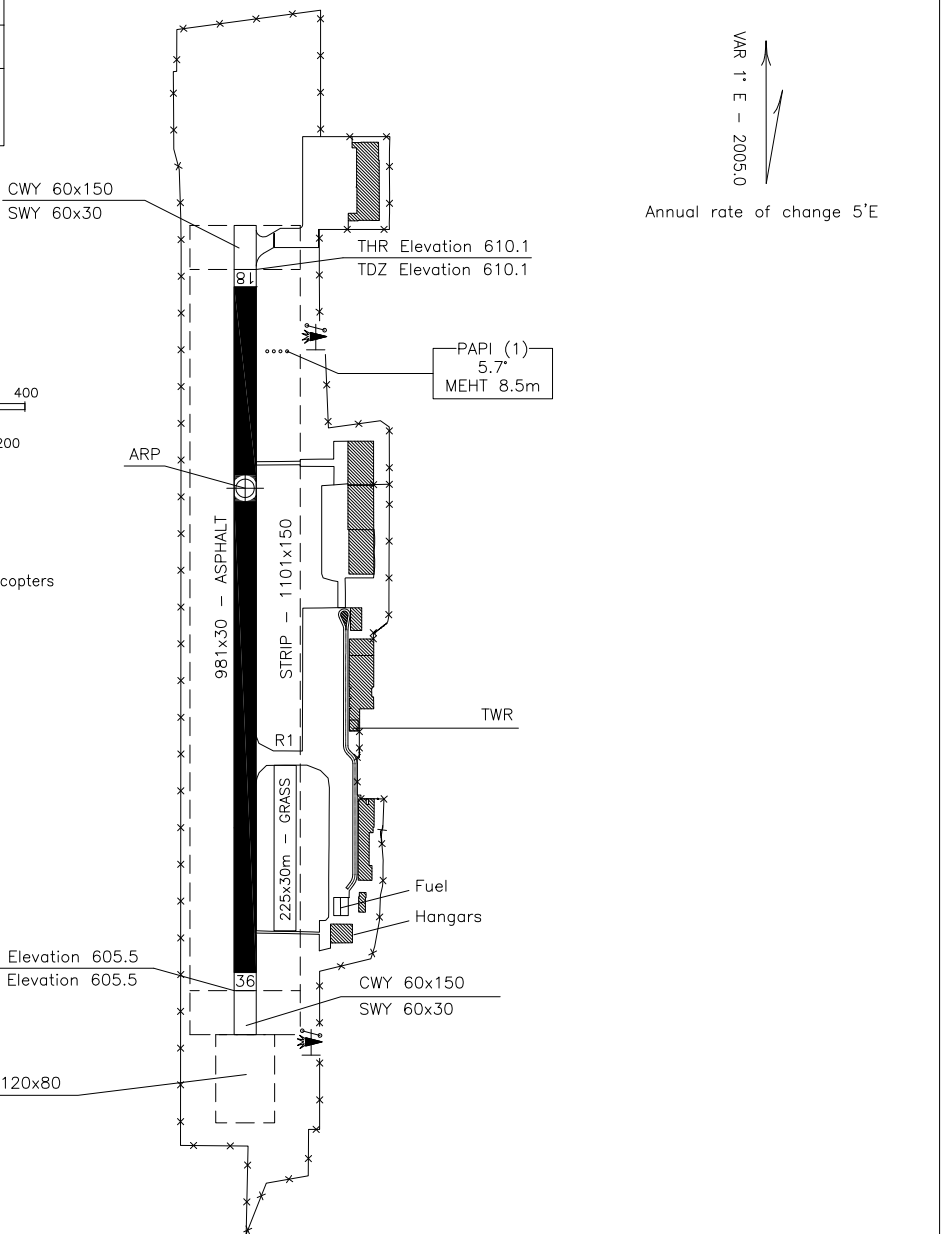


VAR ↑ E - 2005.0
Annual rate of change 5'E



REMARKS:
(1) PAPI RWY18 for the exclusive use of helicopters

| TWY IDENT | WIDTH | bearing strength |
|-----------|-------|--------------------|
| R1 | 23 | 16000Kg S I W L |

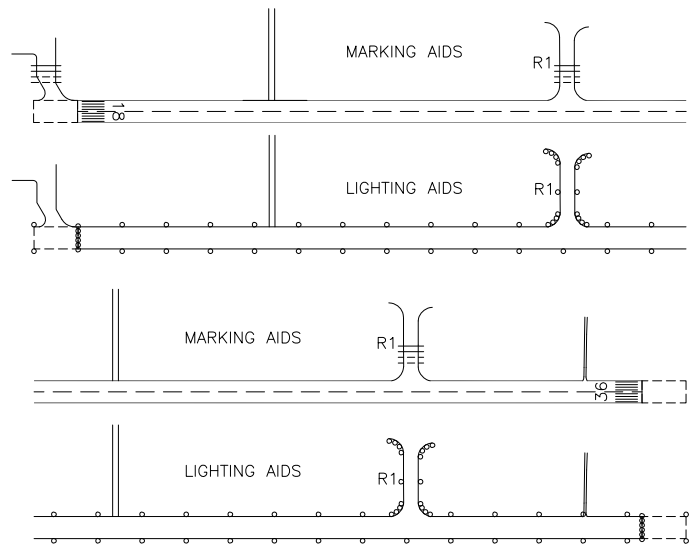

CHANGE: Updated chart